REFERENCE DRAWINGS		
NO.	TITLE	DRAWING NO.
1		

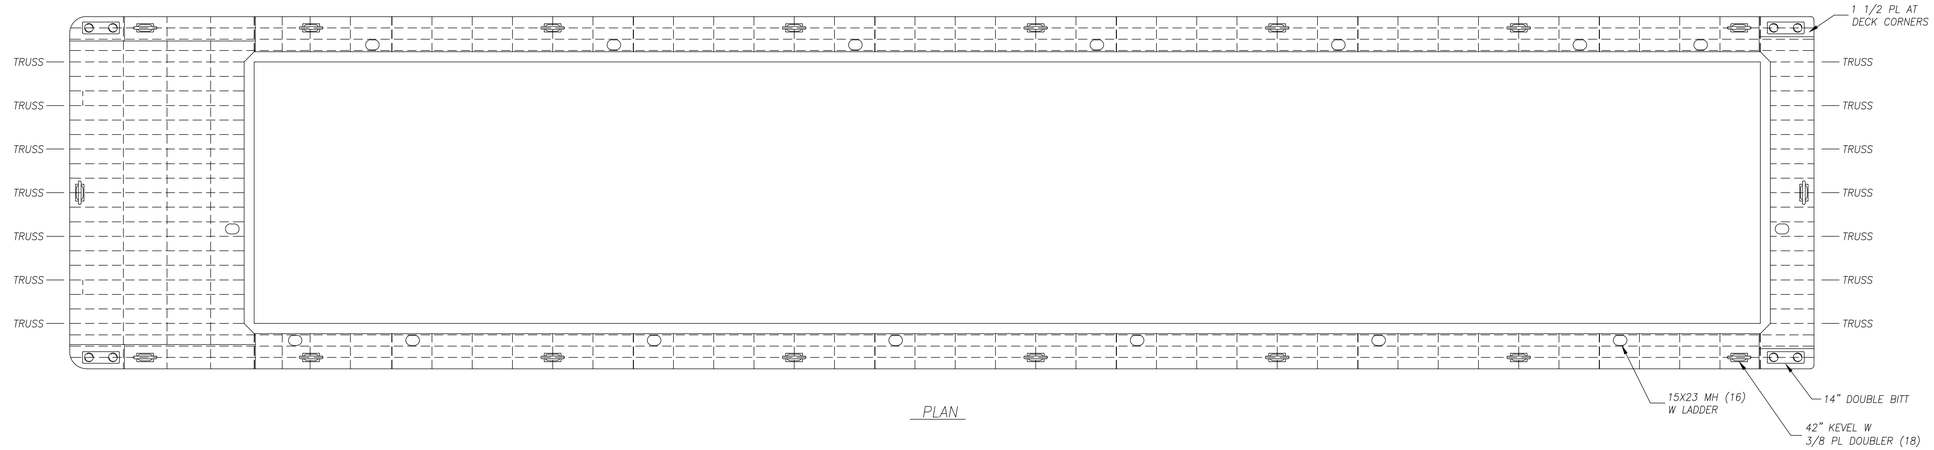

PLAN

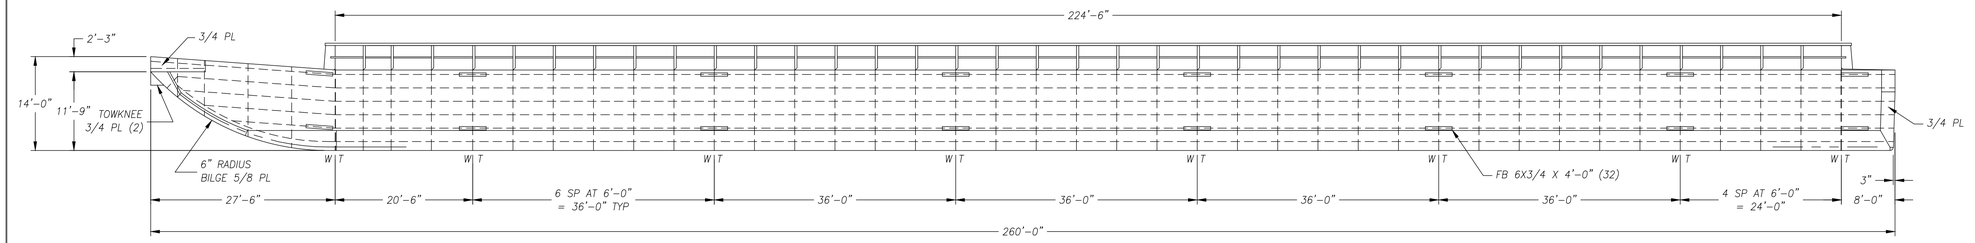

ELEVATION



TRANSOM

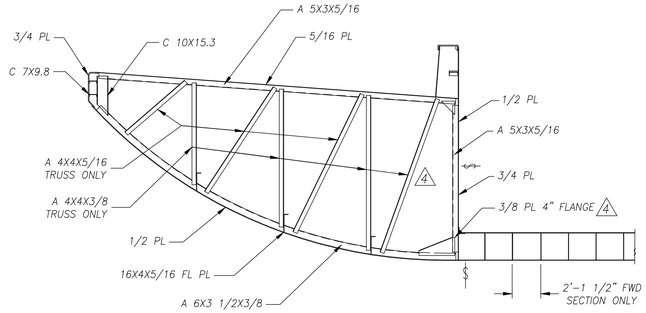

RAKE SECTION

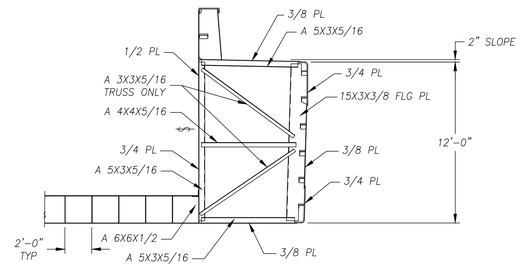

STERN SECTION

GENERAL NOTES:
1) BARGE TO BE DESIGNED AND BUILT ACCORDING TO ABS RULES FOR STEEL VESSELS FOR SERVICE ON RIVERS AND INTRACOASTAL WATERWAYS, BUT NOT CLASSED.

2) ALL INTERIOR VOIDS TO BE TESTED WITH AIR TO 2.0 PSI AND ALL WELD SEAMS PROVED TIGHT.

3) ALL WELDING NOT SHOWN TO BE IN CONFORMANCE WITH ABS RULES FOR STEEL VESSELS FOR SERVICE ON RIVERS AND INTRACOASTAL WATERWAYS.

4) CAPACITIES
HOPPER VOLUME – 122,577 CU FT TO TOP OF COAMING
LIGHT SHIP WEIGHT – 602 SHORT TONS
CARGO WEIGHT AT 8'-6" DRAFT (FRESH WATER) – 2,867 SHORT TONS
CARGO WEIGHT AT 9'-0" DRAFT (FRESH WATER) – 3,078 SHORT TONS
CARGO WEIGHT AT 9'-6" DRAFT (FRESH WATER) – 3,289 SHORT TONS



INTERMEDIATE FRAME

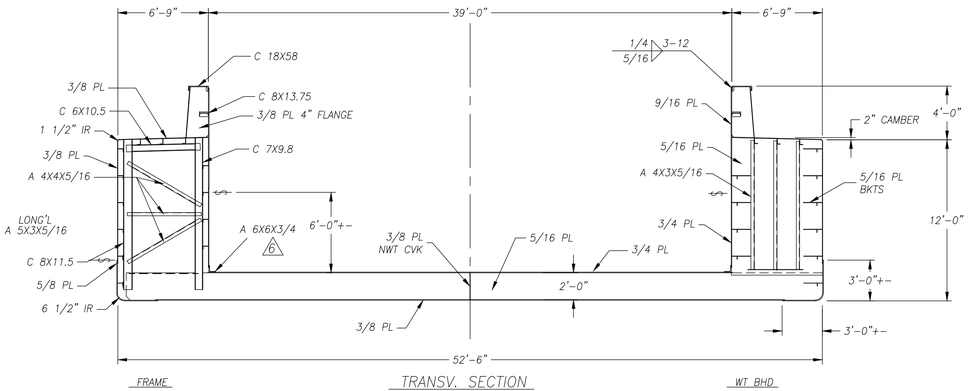

FRAME TRANSV. SECTION WT BHD



SECTION 3A

NO.	REVISIONS	BY	DATE
6	REV BOARDER L TO 3/4"	DWW	2-10-15
5	REV PER CHANGE ORDERS / REV NOTE 4	KDA	9/3/13
4	REV PER CHANGE ORDERS	DWW	7-28-13
3	UPDATED NOTE 4	KDA	4/22/12
2	REV PER CALCS & STD BUILD PRACTICE	DWW	3/27/12
1	ADDED INTERMEDIATE FRAME DETAIL	DVW	3/21/12

DISTRIBUTION CODE

1 CUSTOMER	4 PLANNING AND SCHEDULING	7 ABS–FIELD
2 SALES DEPARTMENT	5 REPAIR ENGINEERING	8 ABS–NEW YORK
3 ENGINEERING	6 PURCHASING DEPARTMENT	9 U S COAST GUARD

DRAWING NO. B-21830

PRINT RECORD

DIST.	NO.	REV.	DATE	DIST.	NO.	REV.	DATE	DIST.	NO.	REV.	DATE
		0									

JEFFBOAT

JEFFERSONVILLE, INDIANA

GENERAL ARRANGEMENT
OPEN HOPPER BARGE
260'–0" X 52'–6" X 12'–0"

THIS PRINT IS THE PROPERTY OF JEFFBOAT

The information contained herein is confidential and not to be traced, reproduced or used in any manufacturing process without written permission from the owner.

X:\SALES QUOTES\HDR\260\52.5-12-6.75-4-001

DESIGN NO. HDR 260-52.5-12-6.75-4-001

SCALE 3/32" & 3/16" = 1'-0" | HULL NO. ------

DRAWN BY DVW DATE 3/21/12

CHK'D BY ____ DATE ____

APP'D BY ____ DATE ____

JOB NO. 120002 | COST ITEM 010

CONTRACT NO. | BILL OF MATERIAL ------- | DRAWING NO. B-21830 | REV 6